




# WISE MECHANIC

## Wet and Dry Vacuum MWW306 20L-35L

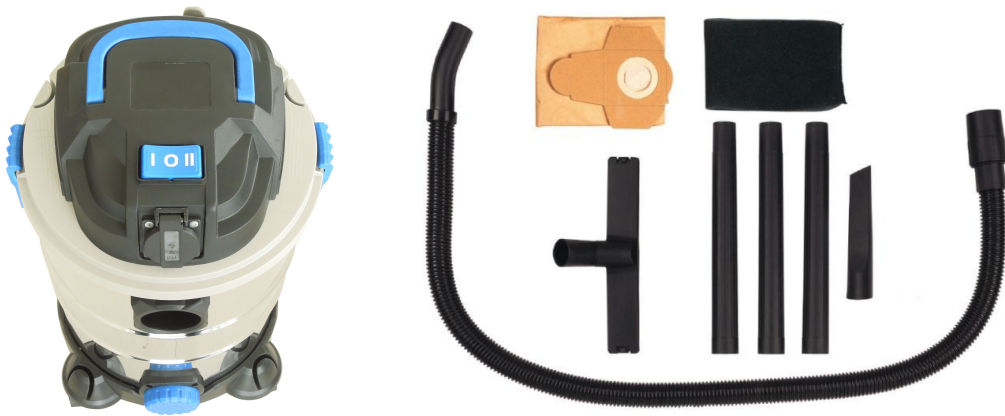

### Description of MWW306 20L-35L

Our wet and dry auto vacuum is used to suck liquids, dry materials, and damp materials. Our electric vacuum unit for wet or dry is suitable for 1200W, 1400W, or 1600W, and tank volume is 20L, 25L, 30L or 35L.

### Compositions

1. This electric vacuum unit for wet or dry is equipped with a  $\Phi 35$  mm suction hose, three plastic suction pipes, a combination nozzle for large and medium areas, and a crevice nozzle for cleaning crevices and edges.
2. Paper bag: it is used to vacuum fine dust.
3. A foam filter can protect the motor against soiling during wet vacuuming.
4. Suction power will be cut off by float switch automatically when the maximum level is reached.
5. Accessory mounted save space: all parts will be stored away quickly and neatly on the cleaner itself based on holders for the cable and accessories.
6. A carry handle and four smooth-running castors of our wet and dry auto vacuum make handling convenient.
7. You can choose power tool socket according to your needs.

Add: No. 997, Chunshen Rd., Panyang Industrial Park, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu, P.R. China.

Post: 215143

Tel: +86-512-66511292

Fax: +86-512-66511298



# WISE MECHANIC

## **Features of MWW306 20L-35L**

1. 20L/25/30/35L tank made of stainless steel
2. 4 castors for better mobility
3. Carry handle and cable holder
4. Our wet and dry auto vacuum has one blow connector.
5. Space saving accessory mount
6. 3pcs plastic suction pipes
7. 1 suction hose  $\Phi 35$  mm
8. 1 Combination nozzle
9. 1 Crevice nozzle
10. Our electric vacuum unit for wet or dry has 1 dirt paper bag
- 11.1 foam filter for wet vacuuming
12. Push & Clean button
13. Water drain screw for easy tank emptying

Add: No. 997, Chunshen Rd., Panyang Industrial Park, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu, P.R. China.

Post: 215143

Tel: +86-512-66511292

Fax: +86-512-66511298



# WISE MECHANIC

## Technical data of MWW306 20L-35L without power tool socket

Model of electric vacuum unit for wet or dry	MWW306 -20L-1200W MWW30 -20L-1400WA MWW306-20L-1400WB MWW306-20L-1600W	MWW306 -25L-1200W MWW306-25L-1400WA MWW306-25L-1400WB MWW306-25L-1600W	MWW306 -30L-1200W MWW306 -30L-1400WA MWW306 -30L-1400WB MWW306-30L-1600W	MWW306 -35L-1200W MWW306 -35L-1400WA MWW306 -35L-1400WB MWW306-35L-1600W
Specification of wet and dry auto vacuum	MWW306 -20L-1200W MWW306 -20L-1400WA Motor: 1200W/1400W MWW306 -20L-1400WB MWW306-20L-1600W Motor:1400W/1600W Mains:100-240V~50/60Hz z Vacuity: $\geq 18\text{KPa}$ Suction hose diameter: 35mm Suction hose length: 1.5m Tank volume:20L Material: stainless steel Thickness:0.4mm Power cord length:4m	MWW306 -25L-1200W MWW306-25L-1400WA Motor: 1200W/1400W MWW306-25L-1400WB MWW306-25L-1600W Motor:1400W/1600W Mains:100-240V~50/60Hz z Vacuity: $\geq 18\text{KPa}$ Suction hose diameter:35mm Suction hose length:1.5 m Tank volume:25L Material: stainless steel Thickness:0.4mm Power cord length:4m	MWW306 -30L-1200W MWW306 -30L-1400WA Motor: 1200W/1400W MWW306 -30L-1400WB MWW306-30L-1600W Motor:1400W/1600W Mains: 100-240V~50/60Hz Vacuity: $\geq 18\text{KPa}$ Suction hose diameter:35mm Suction hose length: 1.5 m Tank volume:30L Material: stainless steel Thickness:0.4mm Power cord length:4m	MWW306 -35L-1200W MWW306 -35L-1400WA Motor: 1200W/1400W MWW306 -35L-1400WB MWW306-35L-1600W Motor:1400W/1600W Mains: 100-240V~50/60Hz Vacuity: $\geq 18\text{KPa}$ Suction hose diameter: 35mm Suction hose length: 1.5 m Tank volume:35L Material: stainless steel Thickness:0.4mm Power cord length:4m

Add: No. 997, Chunshen Rd., Panyang Industrial Park, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu, P.R. China.  
 Post: 215143  
 Tel: +86-512-66511292  
 Fax: +86-512-66511298



# WISE MECHANIC

Packing information of electric vacuum unit for wet or dry	1pc/Carton Carton size: 375×365×480mm	1pc/Carton Carton size: 375×365×545mm	1pc/Carton Carton size: 375×365×591mm	1pc/Carton Carton size: 375×365×657mm
Container loading quantity of wet and dry auto vacuum	426pcs/20FCL 888pcs/40FCL 1055pcs/40HQ	389pcs/20FCL 827pcs/40FCL 894pcs/40HQ	359pcs/20FCL 767pcs/40FCL 816pcs/40HQ	318pcs/20FCL 683pcs/40FCL 767pcs/40HQ

### Technical data of MWW306S 20L-35L with power tool socket

Model of electric vacuum unit for wet or dry	MWW306S -20L-1200W MWW306S-20L-1400WA MWW306S-20L-1400WB MWW306S-20L-1600W	MWW306S-25L-1200W MWW306S-25L-1400WA MWW306S-25L-1400WB MWW306S-25L-1600W	MWW306S -30L-1200W MWW306S -30L-1400WA MWW306S -30L-1400WB MWW306S-30L-1600W	MWW306S -35L-1200W MWW306S -35L-1400WA MWW306S -35L-1400WB MWW306S-35L-1600W
Specification of wet and dry auto vacuum	MWW306S -20L-1200W MWW306S-20L-1400WA Motor: 1200W/1400W MWW306S-20L-1400WB MWW306S-20L-1600W Motor:1400W/1600W Coupler socket max. 2000W Mains:100-240V~50/60Hz Vacuity:≥18KPa Suction hose diameter: 35mm Suction hose length:1.5m Tank volume:20L Material: stainless steel Thickness:0.4mm	MWW306S -25L-1200W MWW306S-25L-1400WA Motor:1200W/1400W MWW306S-25L-1400WB MWW306S-25L-1600W Motor:1400W/1600W Coupler socket max. 2000W Mains:100-240V~50/60Hz Vacuity:≥18KPa Suction hose diameter:35 mm Suction hose length:1.5 m Tank volume:25L Material: stainless steel Thickness:0.4mm	MWW306S -30L-1200W MWW306S -30L-1400WA Motor:1200W/1400W MWW306S -30L-1400WB MWW306S-30L-1600W Motor:1400W/1600W Coupler socket max. 2000W Mains: 100-240V~50/60Hz Vacuity:≥18KPa Suction hose diameter:35mm Suction hose length: 1.5 m Tank volume:30L Material: stainless steel Thickness:0.4mm	MWW306S -35L-1200W MWW306S -35L-1400WA Motor: 1200W/1400W MWW306S -35L-1400WB MWW306S-35L-1600W Motor:1400W/1600W Coupler socket max. 2000W Mains: 100-240V~50/60Hz Vacuity:≥18KPa Suction hose diameter: 35 mm Suction hose length: 1.5 m Tank volume:35L Material: stainless steel Thickness:0.4mm Power cord length:4m

Add: No. 997, Chunshen Rd., Panyang Industrial Park, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu, P.R. China.  
Post: 215143  
Tel: +86-512-66511292  
Fax: +86-512-66511298



# WISE MECHANIC

	Power cord length:4m	Power cord length:4m	Power cord length:4m	
Packing information of electric vacuum unit for wet or dry	1pc/Carton Carton size: 375×365×480mm	1pc/Carton Carton size: 375×365×545mm	1pc/Carton Carton size: 375×365×591mm	1pc/Carton Carton size: 375×365×657mm
Container loading quantity of wet and dry auto vacuum	426pcs/20FCL 888pcs/40FCL 1055pcs/40HQ	389pcs/20FCL 827pcs/40FCL 894pcs/40HQ	359pcs/20FCL 767pcs/40FCL 816pcs/40HQ	318pcs/20FCL 683pcs/40FCL 767pcs/40HQ

Add: No. 997, Chunshen Rd., Panyang Industrial Park, Huangdai Town, Xiangcheng District, Suzhou, Jiangsu, P.R. China.  
 Post: 215143  
 Tel: +86-512-66511292  
 Fax: +86-512-66511298